

**ARCHITECTURAL STANDARDS
PRODUCT DATA SHEET**

M60 /Painting / Clear Finishing

Painting

M60 / 160

PREFERRED SUPPLIER INFORMATION

NBS REFERENCE M60 / 160

MANUFACTURER:

Dulux Trade, Brand of AKZONOBEL

Address


Wrexham Road - Slough - SL2 5DS UK

Tel 0044(0)3332227070

E-mail

Website: www.duluxtrade.co.uk

Supplier: Contact: Dulux.advice@akzonobel.com

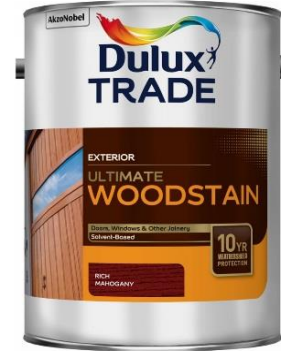

PRODUCT DESCRIPTION

ICL APPROVED SPECIFICATION

Range: Ultimate Woodstain

Description: High performance solvent based exterior woodstain which produces a water repellent satin finish. Unique Ultimate wood protection technology - exterior joinery is protected from weather for up to 10 years if used in accordance with instructions .

Application: Suitable for hardwood and softwoods . Solvent: low odour aliphatic hydrocarbons. Brush application. Not suitable for spraying. Touch dry 4 - 6 hours. Re-coat time - 16 hours

Other Pack sizes 2.5L and 5 L
Coverage - 20 sq.m.
This product should not be thinned
Aquatech Preservative Basecoat should be used first on bare timber (2 coats)
Dulux Trade Ultimate Woodstain on top of the basecoat (2- 3 coats)

TYPICAL NBS SPECIFICATION

M60 Painting / Clear Finishing - 160 decorative woodstain

This product is associated with the following NBS clauses: M60 Painting/ Clear finishing - 160

This product is associated with the following NBS Create clause: 45 - 35 - 84/ 416