UK Energy Storage Conference
20 March - 22 March 2018
Urban Sciences Building,
Newcastle University

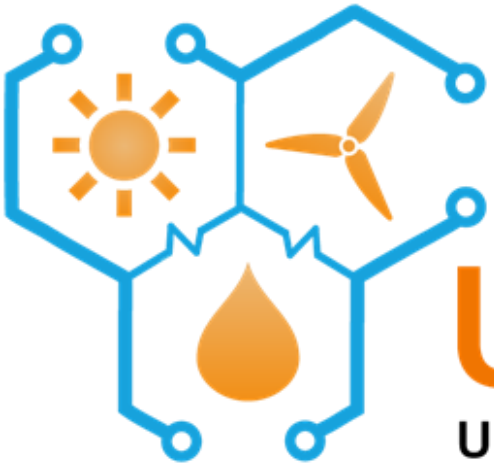

UKES2018

UK Energy Storage Conference

Session 2: Storage for Future Mobility

Newcastle University

Imperial College London

UKES2018
UK Energy Storage Conference

Optimising Li-ion Cell Design for Plug-in Hybrid & Electric Vehicles

Ian Campbell, Krishnakumar Gopalakrishnan, Dr. Monica Marinescu, Dr. Marcello Torchio, Dr. Greg Offer, Prof. Davide Raimondo

i.campbell15@imperial.ac.uk

@Ian_Campbell1

@Imperial_ESE

ENERGY & POWER BALANCE

UKES2018
UK Energy Storage Conference

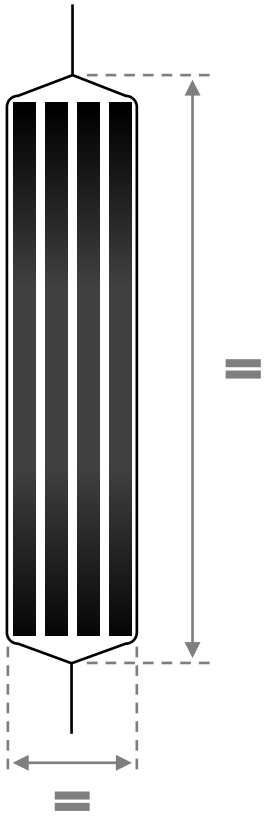

Energy dense

Range

Rate capable

Acceleration

Fast charging

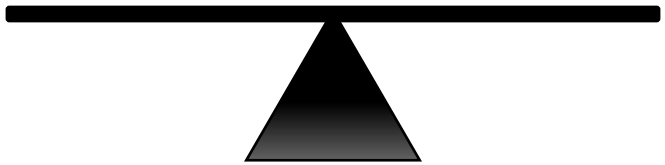

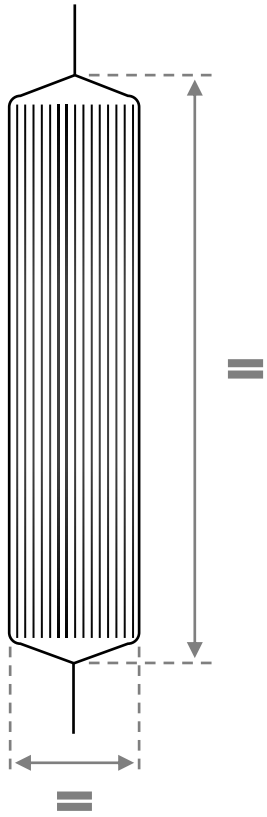

LAYER OPTIMISATION

UKES2018
UK Energy Storage Conference

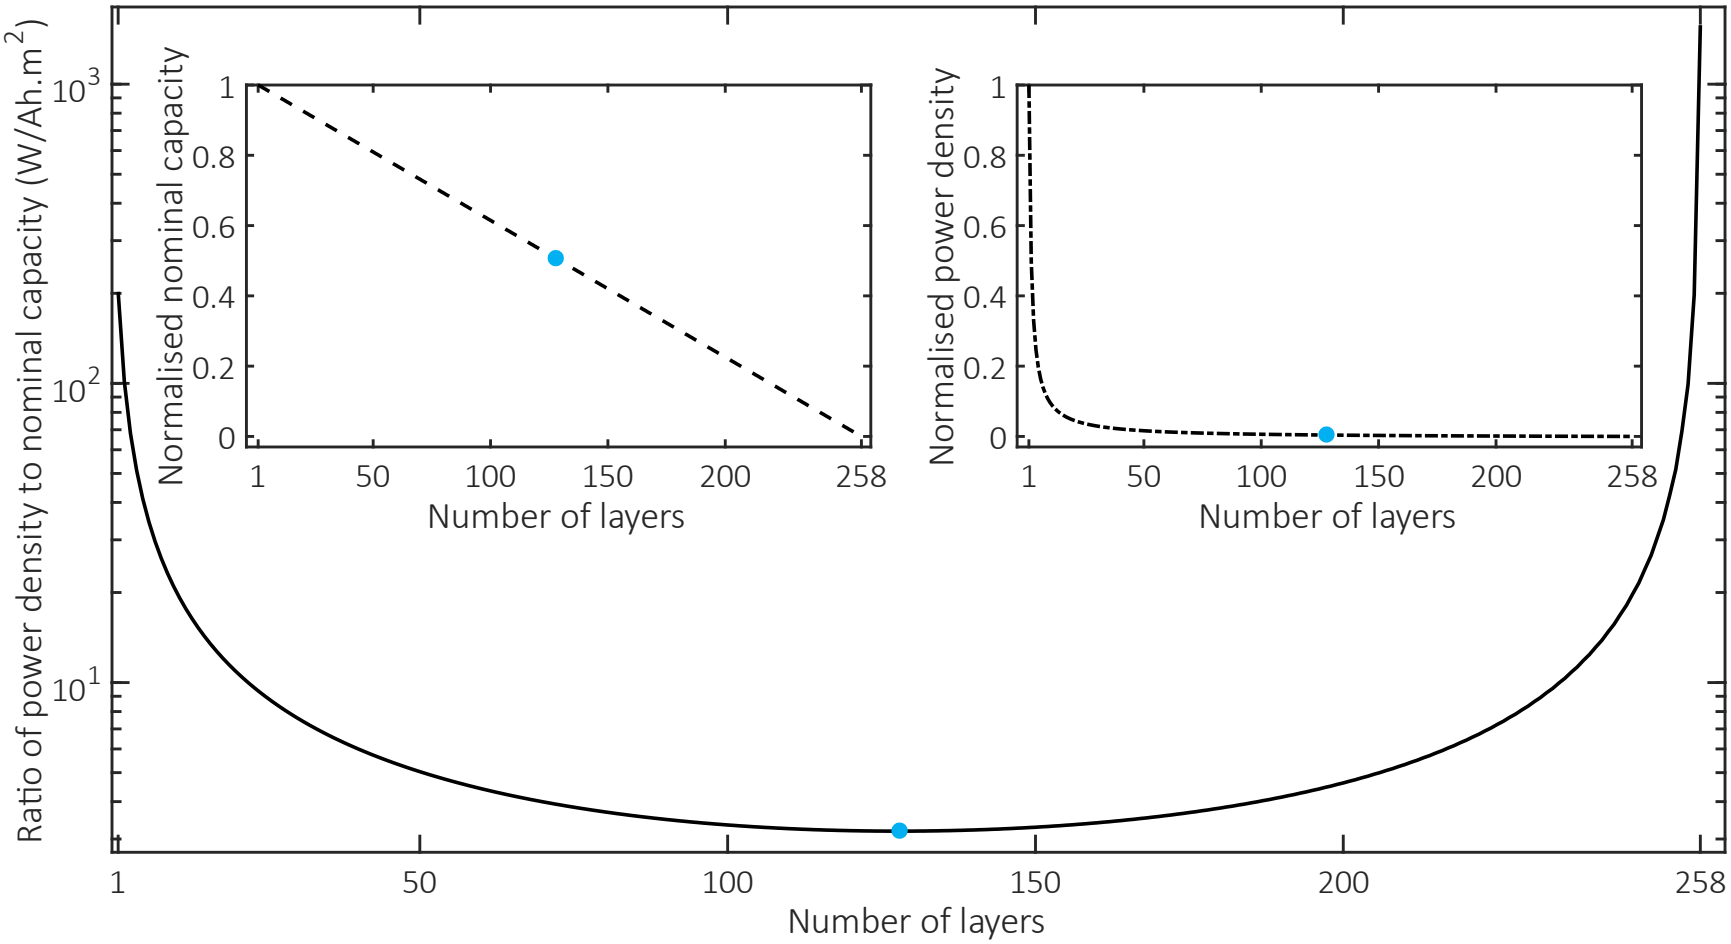

Li^0 PROTECTED FAST CHARGE CRITERION

UKES2018
UK Energy Storage Conference

1 Define vehicle

xEV platform	PHEV
Powertrain	 (series)
Module & cell configuration	8S1P  (modules) 12S1P  (cells)
xEV mass (w/o cells)	1,654 kg (inc. ICE)
Fast charge SOC range	30 - 80 % 

2 Define criteria

CP Fast charging	*Acceleration*
$T(t) < T_{max}$	$T(t_f) < T_{max}$
$V(t) < V_{max}$	$V(t_f) > V_{min}$
$z(t) \geq z^*$	$z(t_f) > z_{min}$
$C_s^*(t) < C_{s_{sat}}$	
$t < t_{max}$	

LAYER SCREENING – P2D SIMULATON

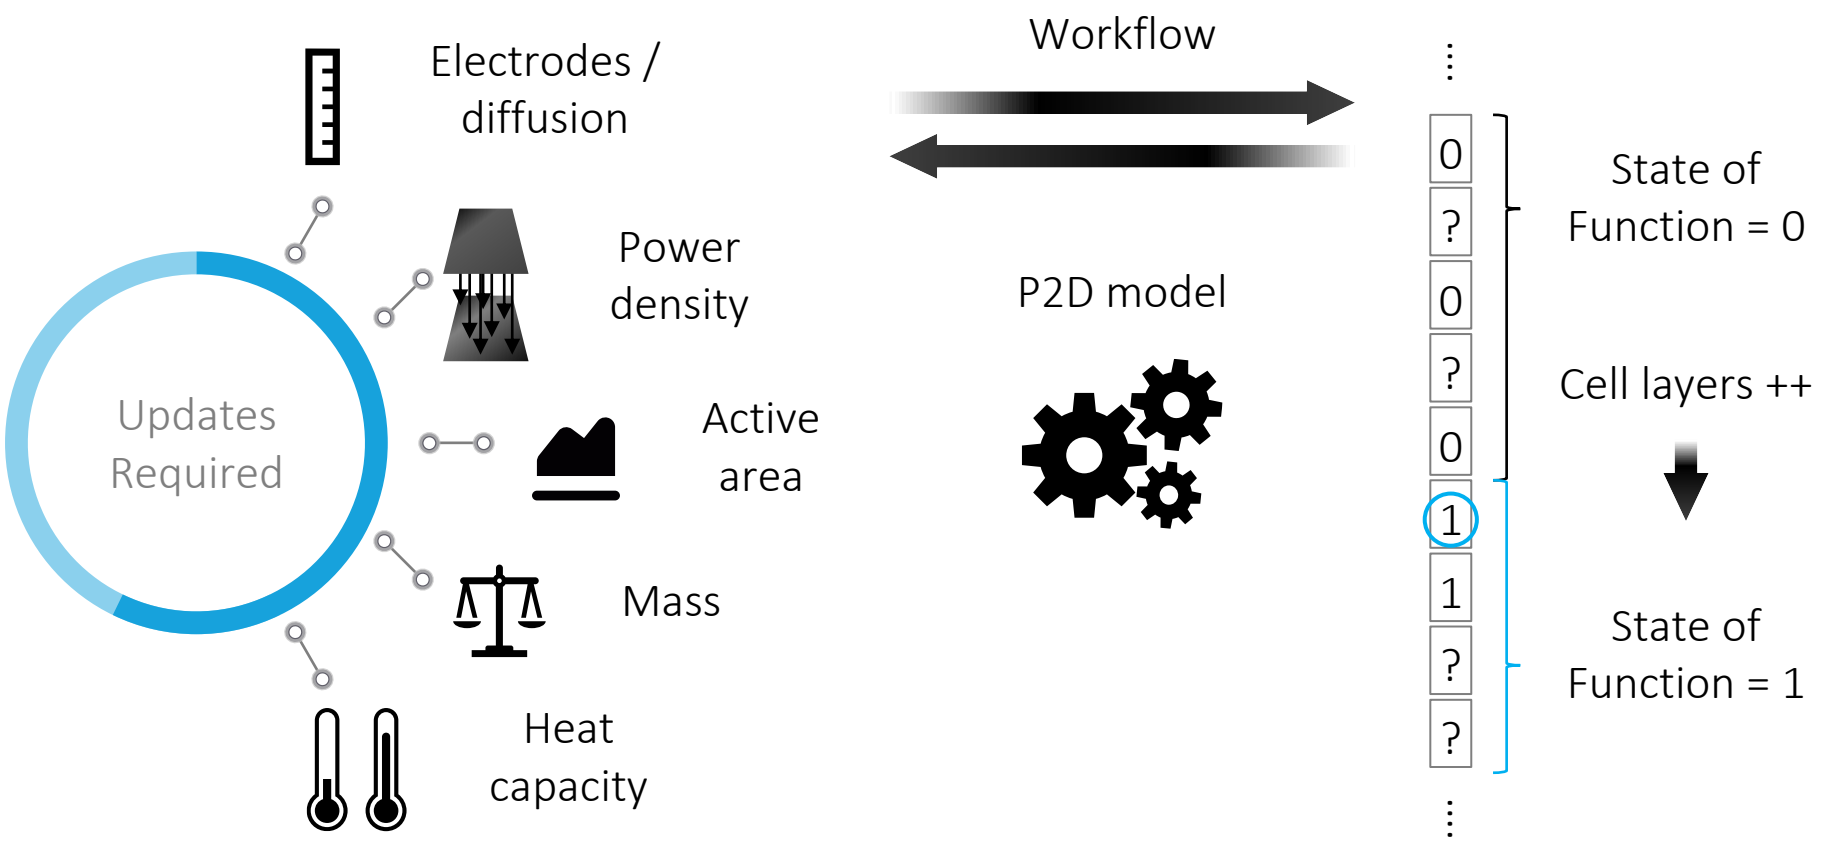

TAILORED CELL DESIGN MAPS

UKES2018
UK Energy Storage Conference

Values: optimal layer counts

PHEV Charging Power: 50 kW

Coolant temp., T_{sink} (°C)	15	20	25	30	35	38
5	110	106	104	101	99	98
10	107	104	101	99	97	96
15	105	102	99	97	95	94
20	103	100	98	96	94	93
25	100	98	96	94	92	91
30	99	96	94	92	91	90
35	97	95	93	91	89	88
38	96	94	92	90	88	88
40	95	93	91	89	88	87
45	93	91	90	88	87	86
49	92	90	89	87	86	85

Initial cell temperature, T_{init} (°C)

PHEV Charging Power: 80 kW

Coolant temp., T_{sink} (°C)	15	20	25	30	35	38
5	127	123	119	116	113	112
10	125	121	118	115	112	110
15	124	120	116	113	111	109
20	122	118	115	112	110	108
25	121	117	114	111	109	107
30	119	116	113	110	107	106
35	118	114	111	109	106	105
38	117	114	111	108	106	105
40	117	113	110	108	105	104
45	115	112	109	107	104	103
49	114	111	108	106	104	103

Initial cell temperature, T_{init} (°C)

PHEV Charging Power: 110 kW

Coolant temp., T_{sink} (°C)	15	20	25	30	35	38
5	140	135	131	127	124	122
10	139	134	130	126	123	121
15	138	133	129	125	122	120
20	136	132	128	124	121	120
25	135	131	127	124	120	119
30	134	130	126	123	120	118
35	133	129	125	122	119	117
38	133	128	125	121	119	117
40	132	128	124	121	118	117
45	131	127	123	120	117	116
49	131	126	123	120	117	125

Initial cell temperature, T_{init} (°C)

PHEV Charging Power: 135 kW

Coolant temp., T_{sink} (°C)	15	20	25	30	35	38
5	150	144	139	135	132	130
10	149	143	139	135	131	129
15	148	143	138	134	131	129
20	148	142	137	133	130	128
25	147	141	137	133	129	127
30	146	141	136	132	129	127
35	146	140	135	132	128	126
38	145	140	135	131	128	126
40	146	140	135	131	128	126
45	144	139	134	131	127	127
49	145	139	134	130	127	

Initial cell temperature, T_{init} (°C)

Charge passed to cell, q (Ah): 25, 24, 23, 22, 21, 20, 19, 18, 17, 16

Colour: ~energy density

Black: TMS limit

Imperial College London

UKES2018
UK Energy Storage Conference

JAGUAR

LAND ROVER

EPSRC
Engineering and Physical Sciences Research Council

Thank you!

Ian Campbell, Krishnakumar Gopalakrishnan, Dr. Monica Marinescu, Dr. Marcello Torchio, Dr. Greg Offer, Prof. Davide Raimondo

i.campbell15@imperial.ac.uk

@Ian_Campbell1

@Imperial_ESE

http://ukenergystorage.co

@UKES2018

cesi@ncl.ac.uk

SIEMENS
Ingenuity for life

NORTHERN POWERGRID

CESI National Centre for Energy Systems Integration

enzen

Newcastle University